



Itabar Pitot Tube-FTH

Technical data

Threaded process connection
PN16-PN100 150lbs-600lbs
DN40-DN1800 11/2"-72"
Sensor Sizes: 20/25/35/65
T max.: 1175°C / 2147F
End support as an option
Extraction via gearing
Optional Gearbox
Sensor material: AISI 316Ti 904L, Duplex, Hastelloy C4, Monel 400, Incoloy 800 Inconel 600

Drawings for FTH

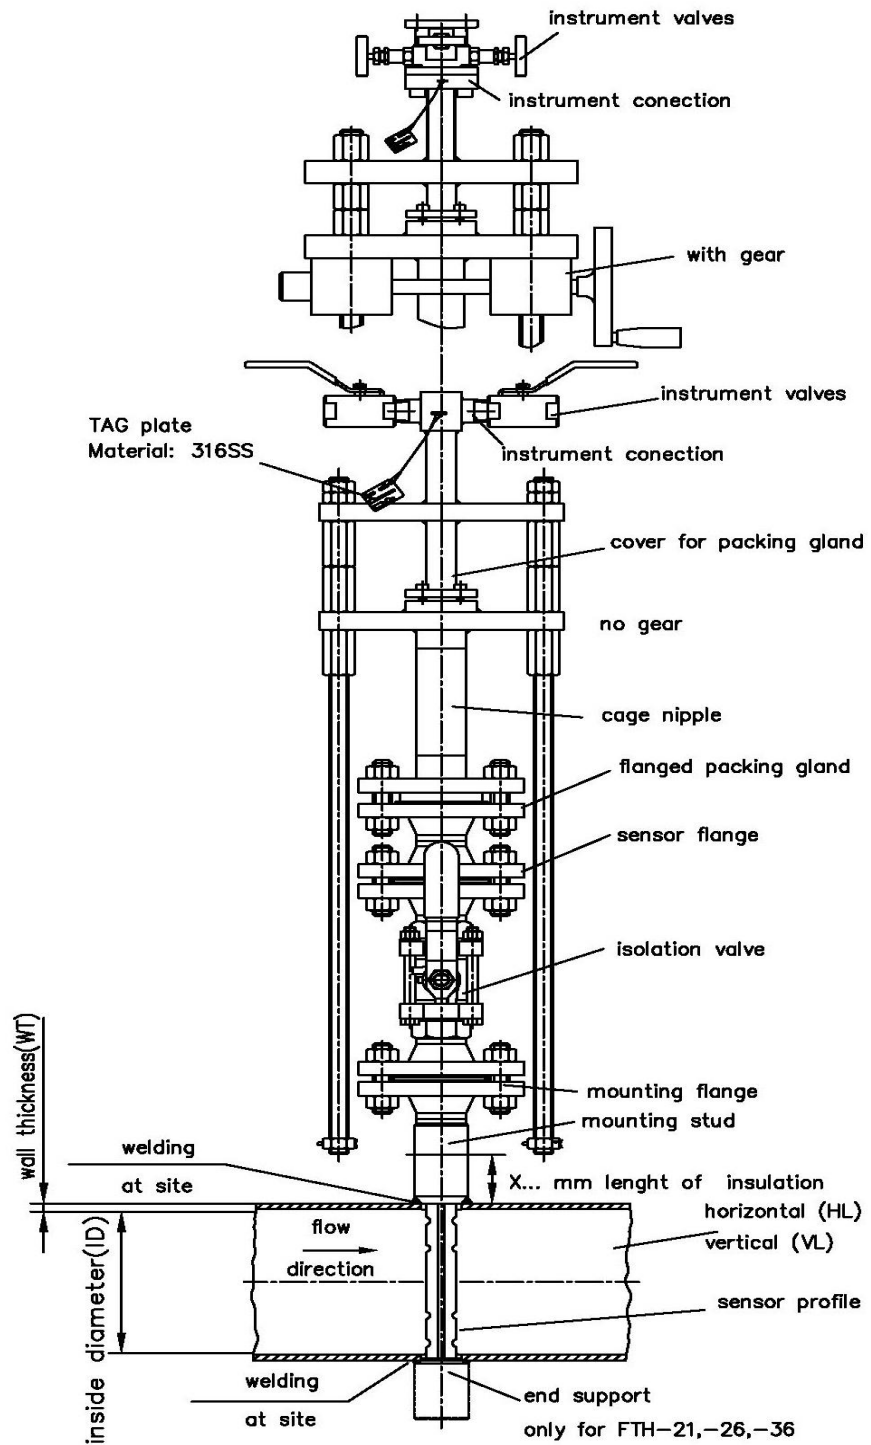

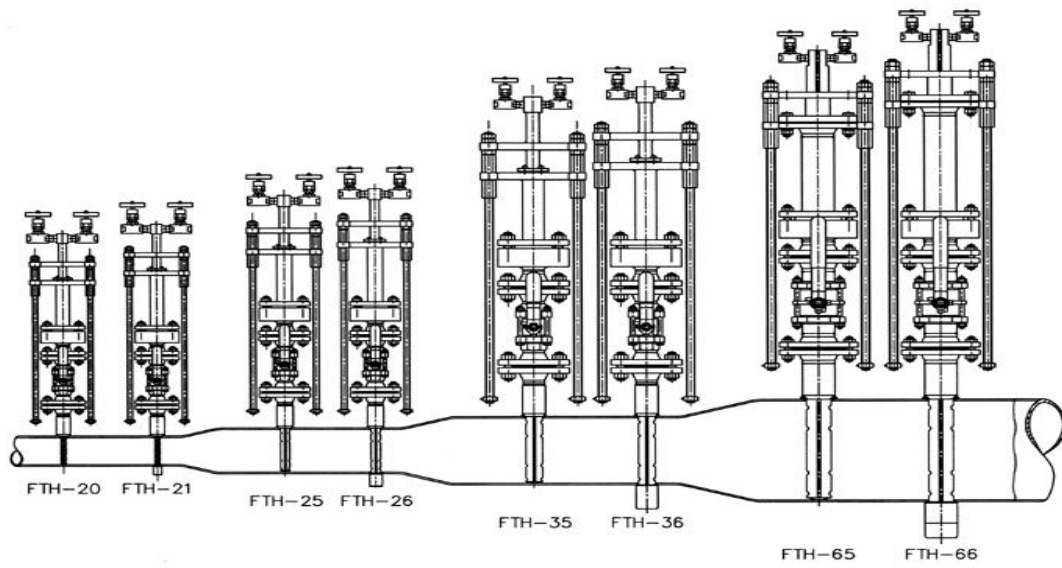

Pipe diameter		Maximum allowable volumetric flow in m ³ /h							
		Sensor type							
Inches	mm	FTH -20	FTH -21	FTH -25	FTH -26	FTH -35	FTH -36	FTH -65	FTH -66
1 1/2	DN 40	40	114	---	---	---	---	---	---
2	DN 50	59	161	---	---	---	---	---	---
2 1/4	DN 65	93	243	---	---	---	---	---	---
3	DN 80	130	328	---	---	---	---	---	---
4	DN 100	179	439	205	544	---	---	---	---

