


Itabar Pitot Tube-IBR


Technical data


Threaded process connection
PN16-PN40 150lbs-300lbs
DN25-DN2000 1"-80"
Sensor Sizes: 20/25/35/65
T max: 450°C / 842F
End support as an option
Sensor material: AISI 316Ti

separate installation of sensor and transmitter

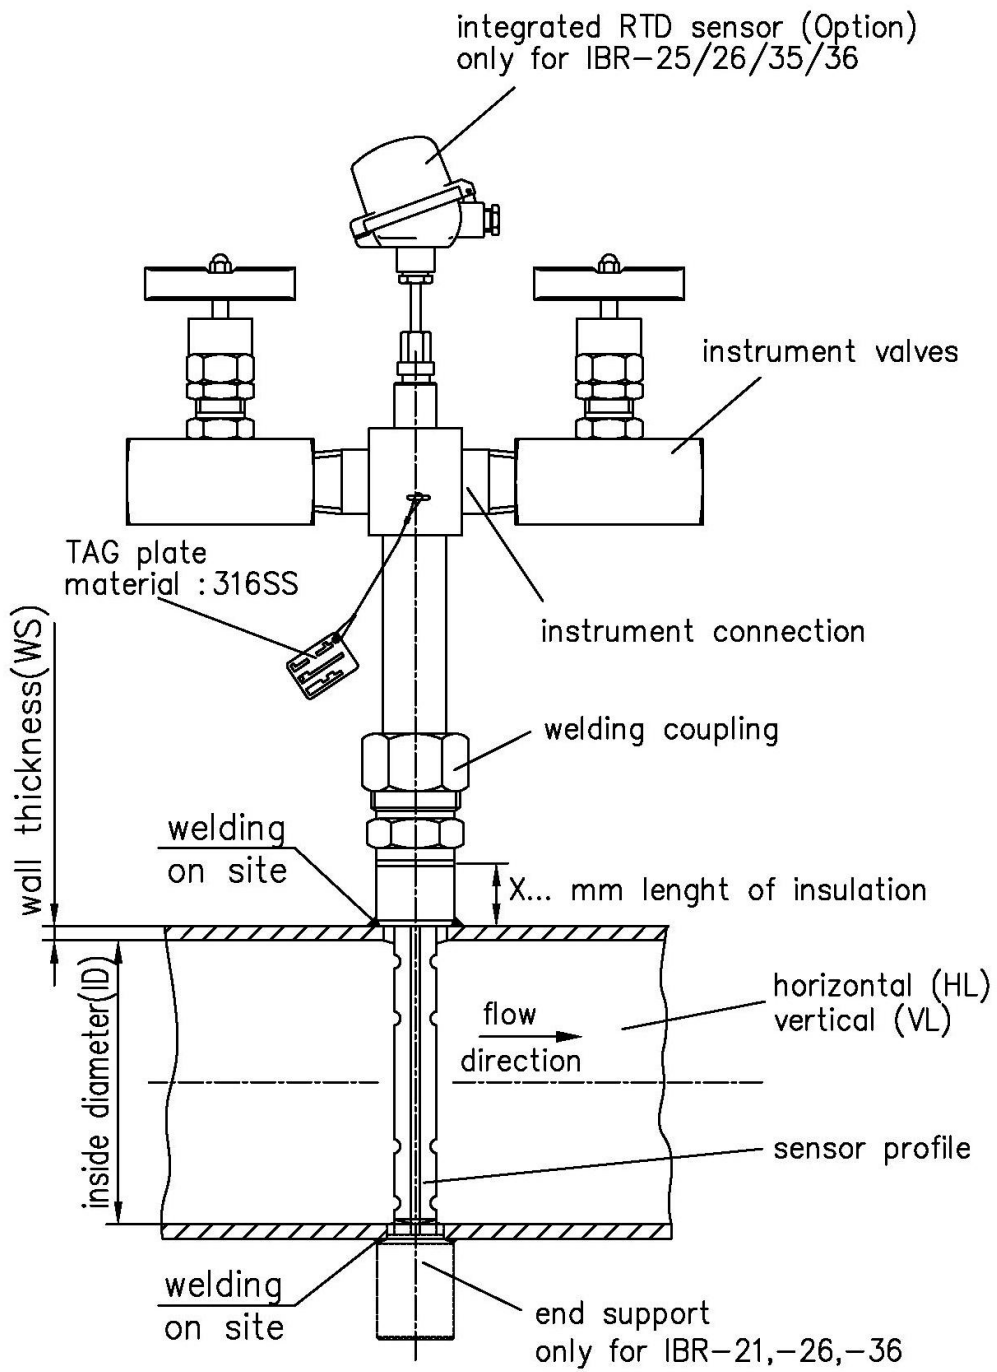

compact version electr. d.p.transmitter mounted onto the flow sensor (only with A06)

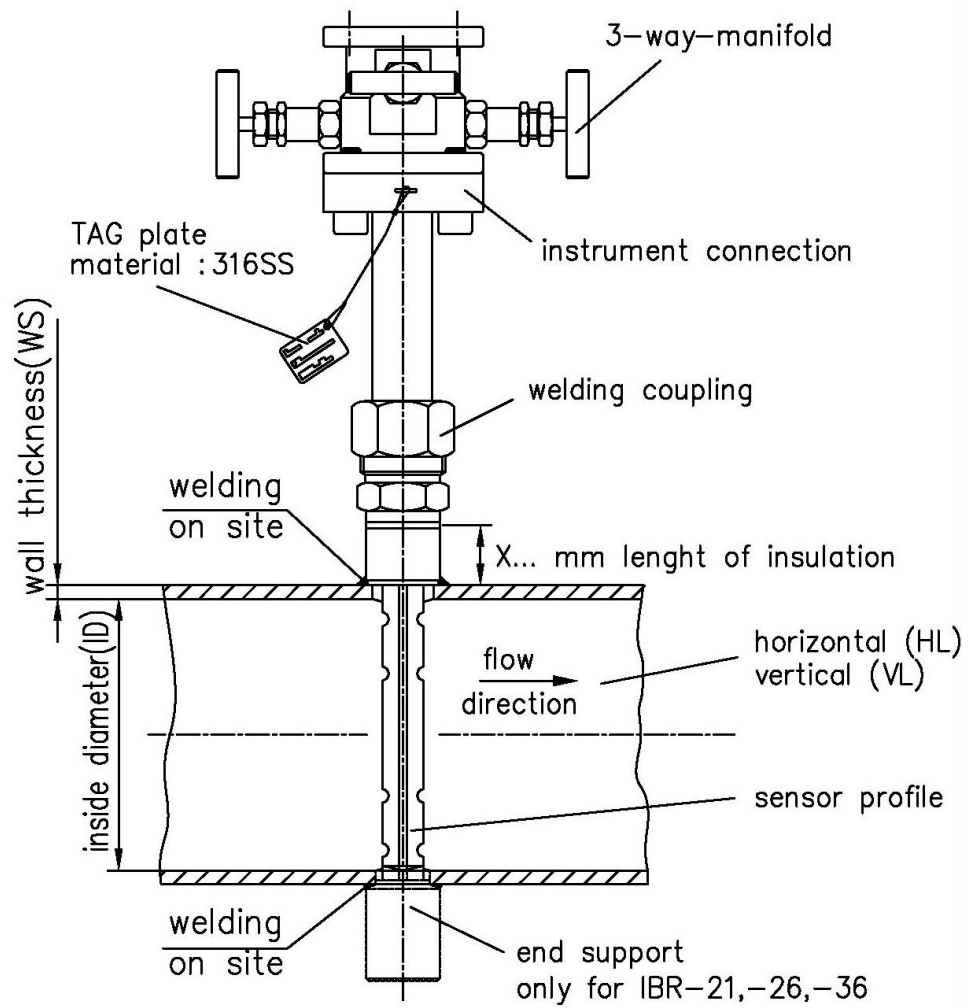

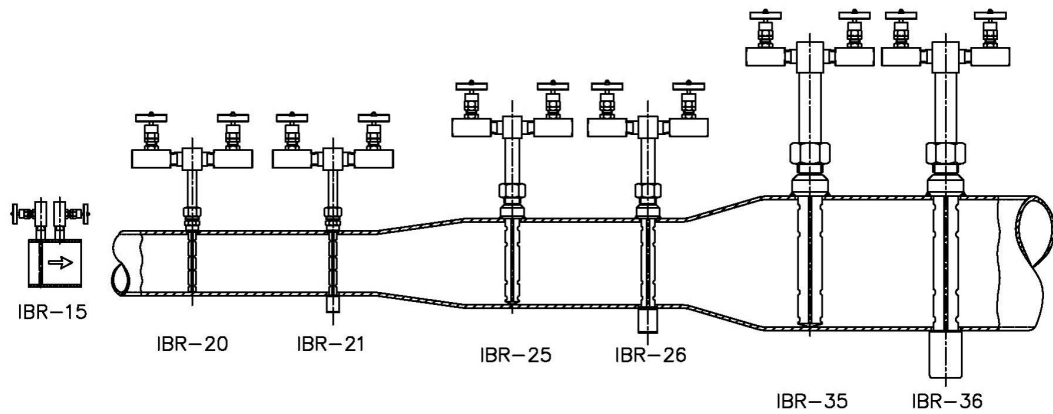

Pipe Size DN	Pipe Size Inches	Max. volumetric flow m ³ /h						
		IBR-15	IBR-20	IBR-21	IBR-25	IBR-26	IBR-35	IBR-36
DN 25	1	36	---	---	---	---	---	---
DN 32	1 ¼	51	---	---	---	---	---	---
DN 40	1 ½	---	52	123	---	---	---	---
DN 50	2	---	75	175	---	---	---	---
DN 65	2 ¼	---	114	264	---	---	---	---
DN 80	2 ½	---	156	355	---	---	---	---
DN 100	4	---	210	476	256	594	---	---
DN 125	5	---	---	---	341	784	---	---
DN 150	6	---	---	---	426	973	---	---
DN 200	8	---	---	---	595	1345	---	---
DN 250	10	---	---	---	776	1747	---	---
DN 300	12	---	---	---	970	2178	2004	4501
DN 350	14	---	---	---	1155	2592	2408	5399
DN 400	16	---	---	---	1335	2990	2813	6300

